

Eurocard extender boards

Multilayer extenders

This multilayer extender board offers the engineer the best possible guarantee against crosstalk due to the 0V guarding being positioned on three sides of each individual signal line.

The multilayer construction features a control 0V ground plane inner layer with a latticed trace around all jumper pin positions for maximum shielding. The extender board features 42 signal lines on both sides of the board which are protected by an 0V guard track between each pair of signal lines. The guard track is connected to the 0V inner layer plane at both ends by the use of via holes.

The power rails on the outer edges of the board feature a cross patching facility which uses jumper links in order to give the user complete flexibility when trying to match a particular backplane system. The board is supplied completely assembled with connectors at both ends.

Power rails are committed to pins 1abc, 2abc, 31abc and 32abc. If necessary any of these power rails may be connected to the 0V inner plane by use of cross patching jumper links.

Features


- 3 layer bonded multilayer construction with a 0V ground plane sandwich between layers
- Patented 0V guard tracking between all signal lines
- Flexible power rail construction with up to four separate Vcc rails and a 0V return plane
- Voltage and current measuring facilities are available by use of wirewrapping pins and jumper links which are fully assembled to the board
- Logic analyser or backplane stub terminator position on board
- Expandable to 3U, 6U, 9U etc. in many combinations using the compatible range of PTH and super PTH extender boards
- Suitable for 160 and 220mm deep systems
- Compatible with multilayer Microbus backplanes and PTH backplanes
- Support/eject mechanism to ensure that the daughter board remains captive within the guides when ejecting and that the correct connector breaks when dismantling

Multilayer Extenders	Ordering information
Description	Order code
96/96 multilayer extender board	38-39084
Extender board conversion kit	188-27542


Board specification

Board type	Epoxy glass
Plated through hole	BS4584 part 16
Copper thickness to outer layers	38µm
Plated copper	37µm
Tin lead	5µm
Total	80µm
Copper thickness inner layers	38µm

Note: bare boards are UL 94 V-0 recognised components file number E116551. Bare boards are approved to BS9762.

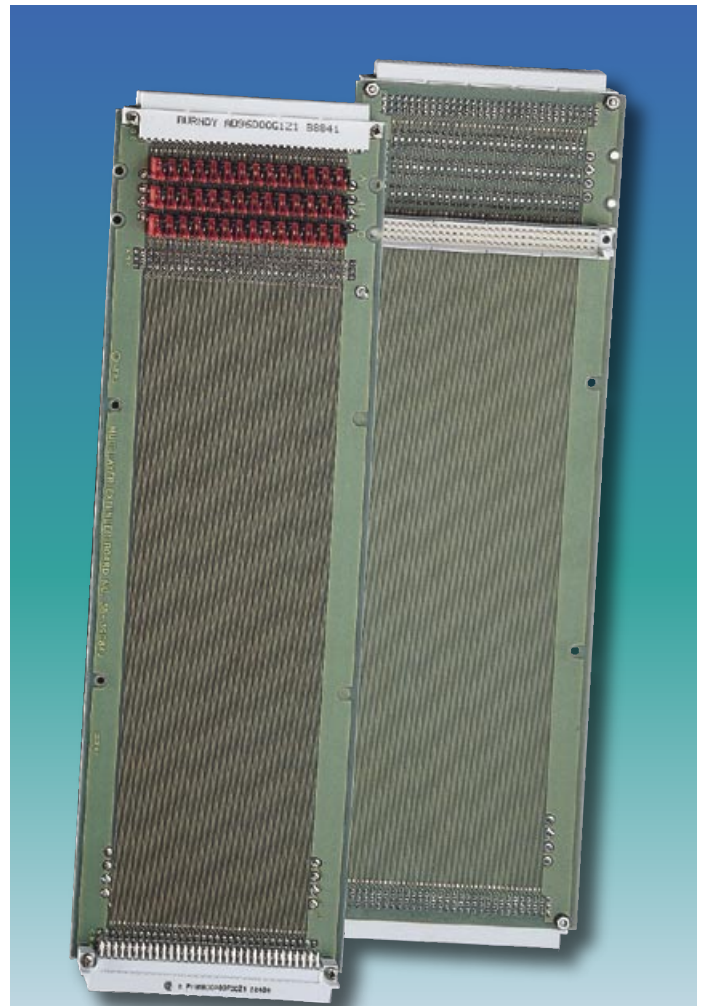

Multilayer Extender boards

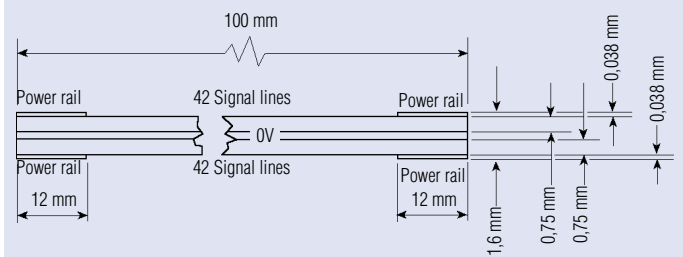

Characteristics impedance

The separation of signal layers to the 0V ground plane is 0,74mm and the signal track width is 0,3mm which gives a theoretical characteristic impedance of 94Ω with a Zo tolerance of ±5%.

Note: Zo = 94Ω ±5% excluding all holes in the boards

Zo = approximately 80Ω including connector and jumper pin holes

Zo = approximately 65Ω when active daughter board is in position.

Note: The guard tracking arrangement is manufactured under licence from University College, London.