



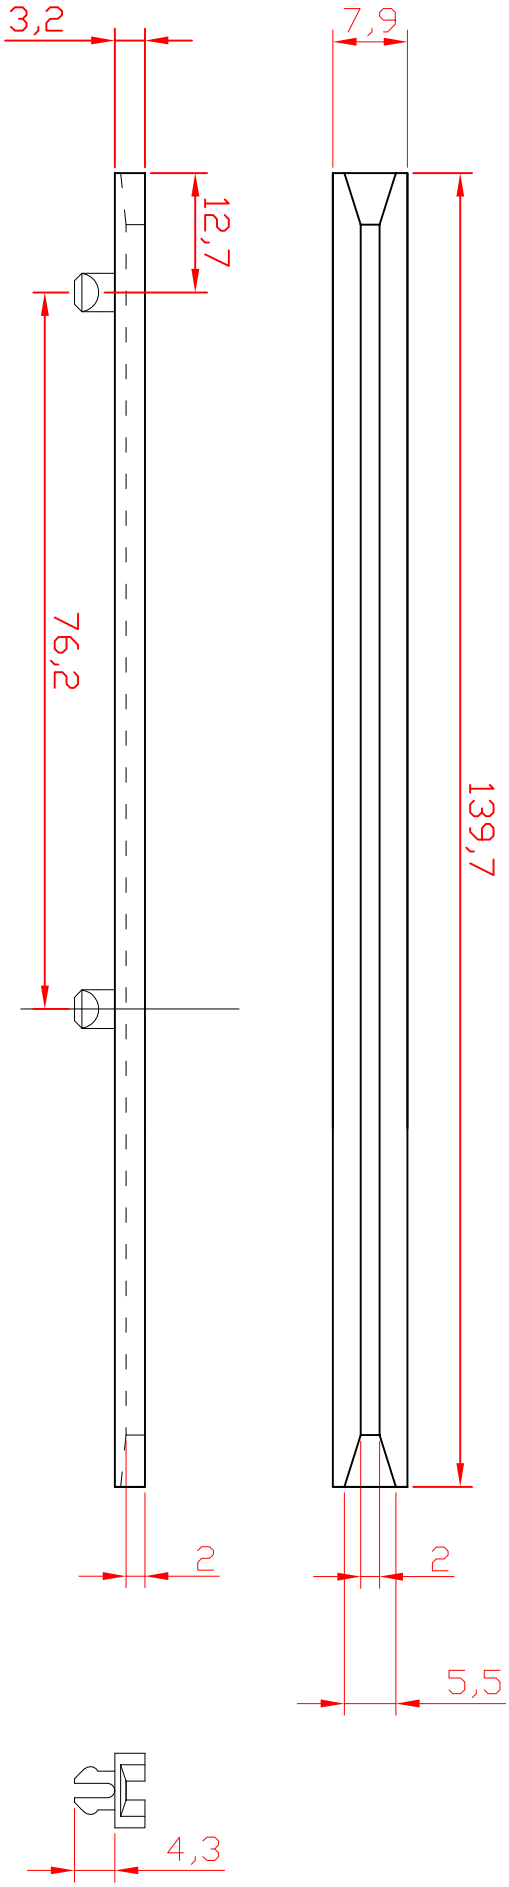

Mounting Hole detail

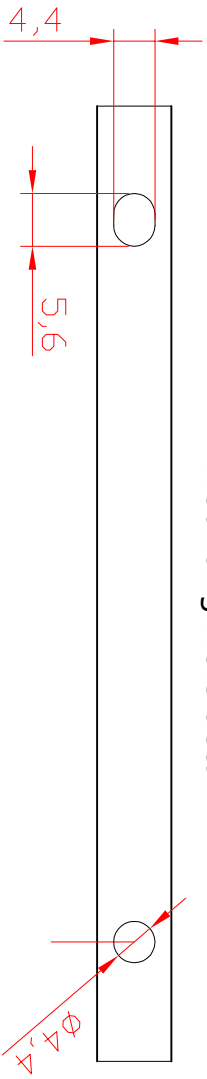

Because of the hygroscopic effect of moisture on Nylon 66 it is recommended that one of the holes should be obround 5,6*4,4 to allow for variation in length if used in potentially humid atmospheres.

Material thickness for fixing anti-vibration guides. Min 1,52 Max 1,78mm

MATERIAL SPECIFICATION

Material: Nylon 66 or equivalent

Colour: Black

Flammability Characteristics UL94V-2



VERO TECHNOLOGIES

Unit 25, Solent Ind. Est.,
Hedge End, Southampton,
Hants, SO30 2FY, UK
Tel +44 (0) 1489 776 930

VERO TECHNOLOGIES Ltd

TOLERANCES EXCEPT WHERE
OVER STATED

SIZE	± 0,1mm
ANGLE	± 0,3
FINISH	± 0,0

ALL DIMENSIONS IN MILLIMETRES

PROJECTION



TITLE

Clip in guide 5.5 Inch

FINISH

29-0124

FIRST USED ON.

CHECKED

DRG. ISSUE

1

DESCRIPTION

DATE

B/A

29-0124 Customer